ZIONICS IS ABUTMENT SYSTEM


Zion Co., Ltd. uses Grade 5 titanium alloys from FORT WAYNE Co., Ltd.

It has an international reputation as a titanium supplier in the medical field, to minimize product deformation.


95% global share of titanium wire for human insertion,

Used by leading implant manufacturers such as Strauman and Zimmer.

We produce products with such reliable quality raw materials.

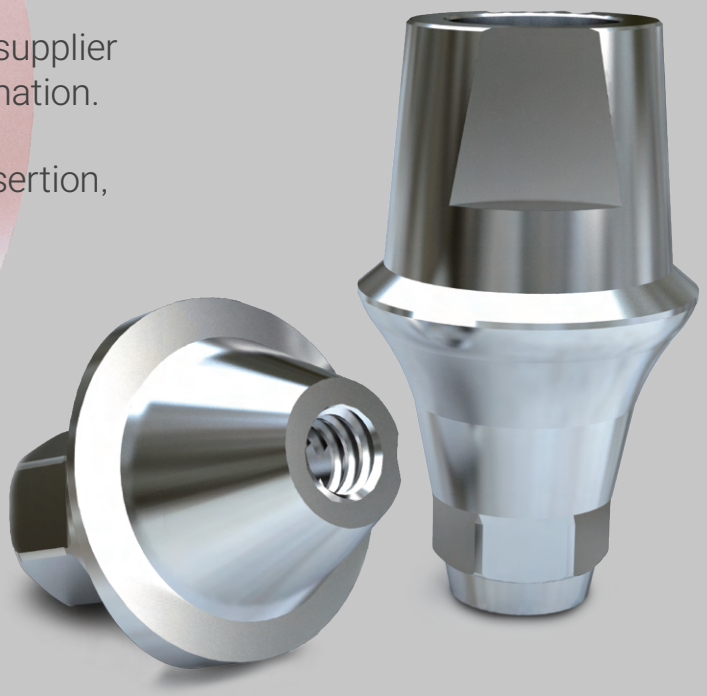

ZION

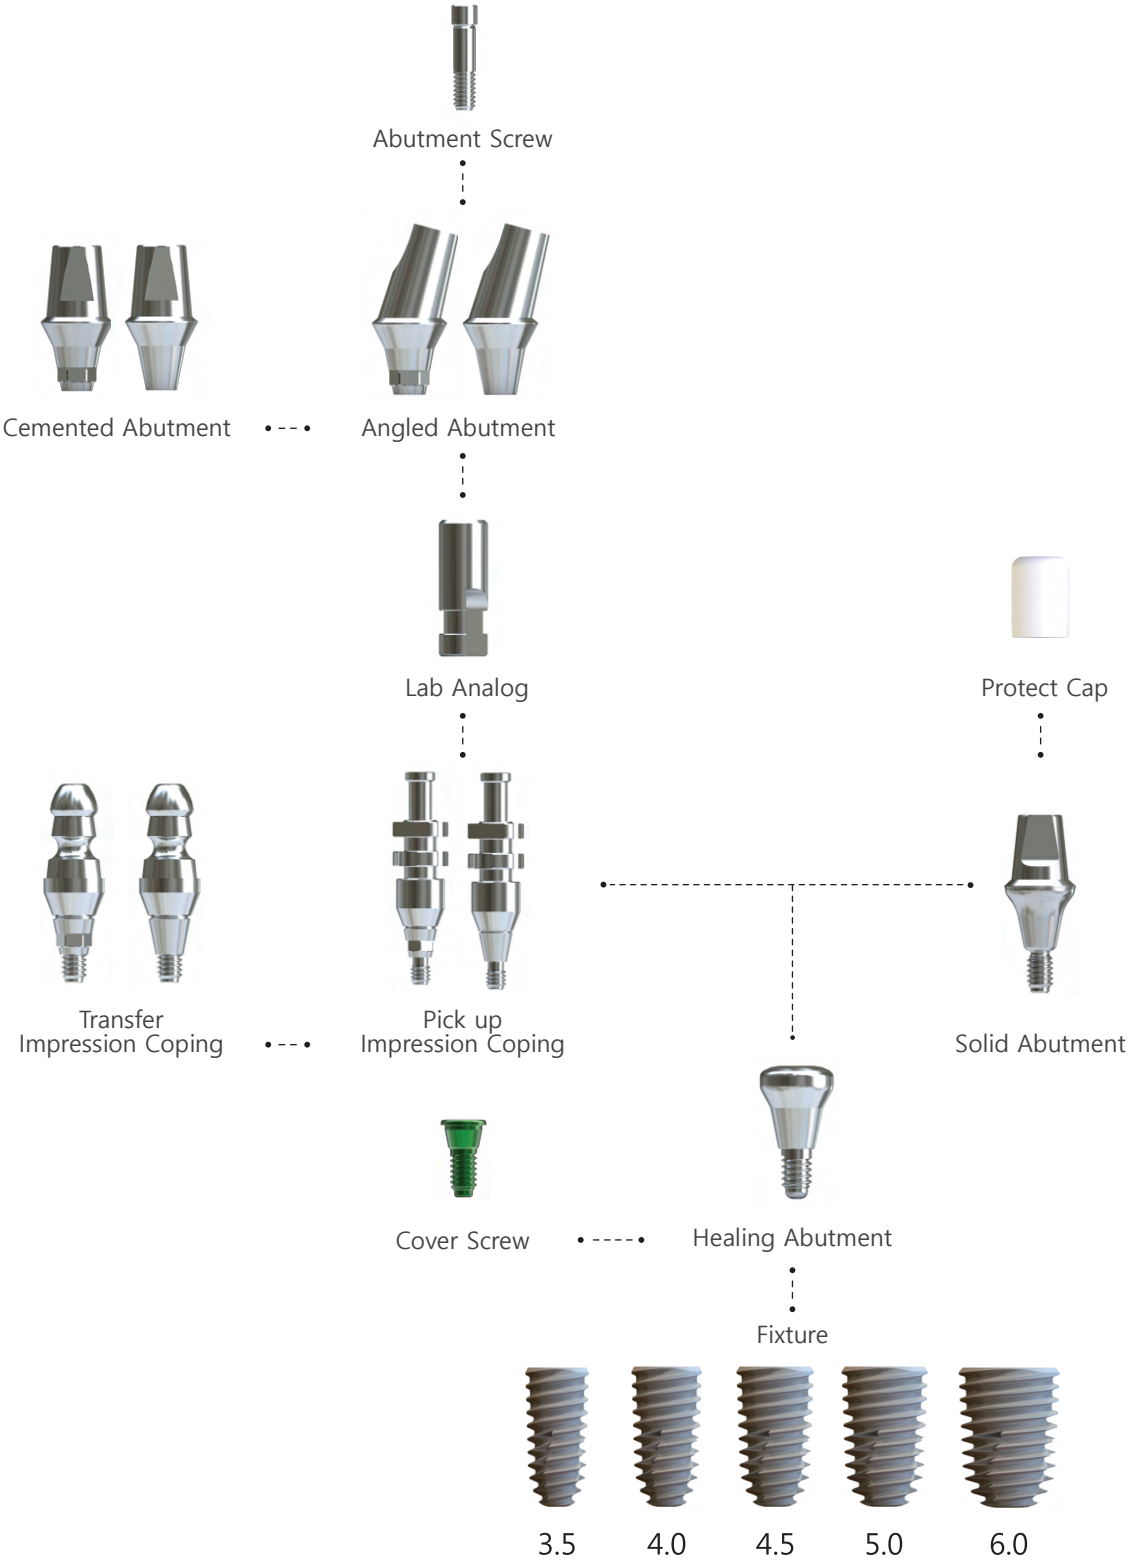
Abutment Screw
Cemented Abutment
Angled Abutment
Lab Analog
Protect Cap
Transfer
Impression Coping
Pick up
Impression Coping
Solid Abutment
Cover Screw
Healing Abutment
Fixture
3.5
4.0
4.5
5.0
6.0


Healing Abutment



Hight/Diameter	4.0(D)	4.5(D)	4.8(D)
2.0(C)	ISHN4020	ISHN4520	ISHN4820
3.0(C)	ISHN4030	ISHN4530	ISHN4830
4.0(C)	ISHN4040	ISHN4540	ISHN4840
5.0(C)	ISHN4050	ISHN4550	ISHN4850
6.0(C)	ISHN4060	ISHN4560	ISHN4860
7.0(C)	ISHN4070		ISHN4870
9.0(C)	ISHN4090		

- How to use: Use 1.2 Hex Driver / Tightening torque 5 ~ 8Ncm


Pick up Impression Coping (Hex)

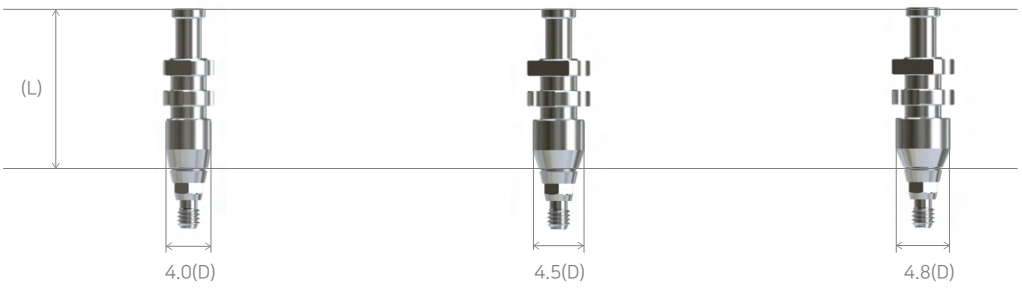

Length/Diameter	4.0(D)	4.5(D)	4.8(D)
16.0(L)	ISIH40S	ISIH45S	ISIH48S
21.0(L)	ISIH40L	ISIH45L	ISIH48L

- How to use: Use 1.2 Hex Driver


(N-Hex)

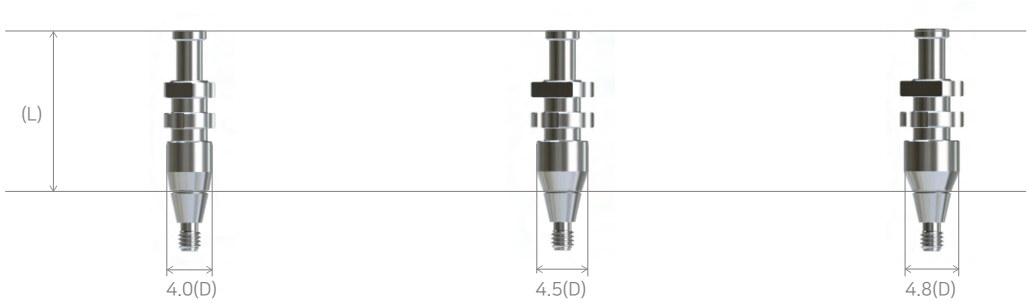

Length/Diameter	4.0(D)	4.5(D)	4.8(D)
16.0(L)	ISIN40S	ISIN45S	ISIN48S
21.0(L)	ISIN40L	ISIN45L	ISIN48L

- How to use: Use 1.2 Hex Driver


Transfer Impression Coping
(Hex)

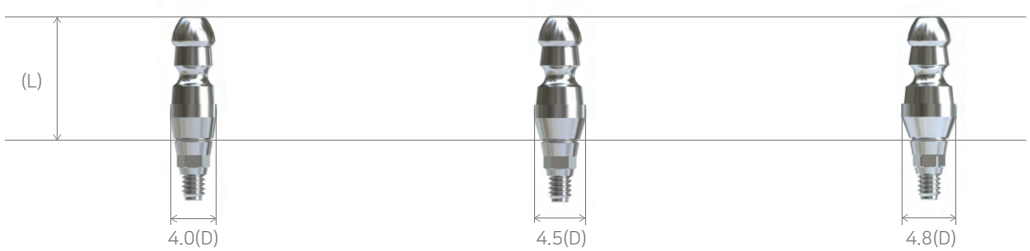

Length/Diameter	4.0(D)	4.5(D)	4.8(D)
11.0(L)	ISTH40S	ISTH45S	ISTH48S
14.0(L)	ISTH40L	ISTH45L	ISTH48L

- How to use: Use 1.2 Hex Driver

(N-Hex)

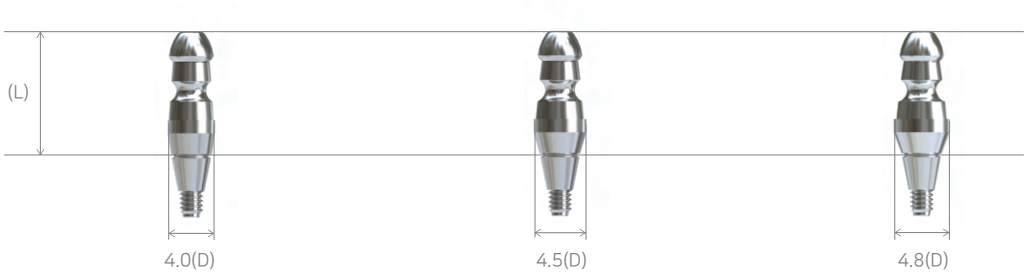

Length/Diameter	4.0(D)	4.5(D)	4.8(D)
11.0(L)	ISTN40S	ISTN45S	ISTN48S
14.0(L)	ISTN40L	ISTN45L	ISTN48L

- How to use: Use 1.2 Hex Driver

Lab Analog



Diameter	4.3(D)
Hex	ISLH01

- Purpose of use: Implement intraoral fixture in working model


Cover Screw



SCS3404(A)

- How to use: Use 1.2 Hex Driver / Tightening torque 5 ~ 8Ncm


Cemented Abutment (Hex)

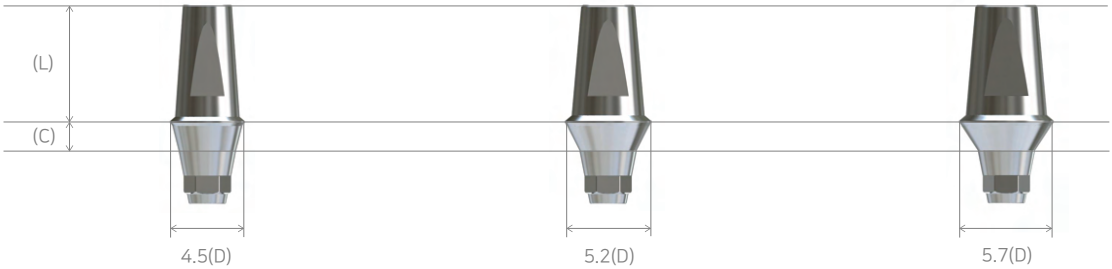

Diameter	4.5(D)			5.2(D)			5.7(D)		
Cuff/Length	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)
1.0(C)	ISCH451040	ISCH451055	ISCH451070	ISCH521040	ISCH521055	ISCH521070	ISCH571040	ISCH571055	ISCH571070
2.0(C)	ISCH452040	ISCH452055	ISCH452070	ISCH522040	ISCH522055	ISCH522070	ISCH572040	ISCH572055	ISCH572070
3.0(C)	ISCH453040	ISCH453055	ISCH453070	ISCH523040	ISCH523055	ISCH523070	ISCH573040	ISCH573055	ISCH573070
4.0(C)	ISCH454040	ISCH454055	ISCH454070	ISCH524040	ISCH524055	ISCH524070	ISCH574040	ISCH574055	ISCH574070
5.0(C)	ISCH455040	ISCH455055	ISCH455070	ISCH525040	ISCH525055	ISCH525070	ISCH575040	ISCH575055	ISCH575070

- How to use: Use 1.2 Hex Driver / Tightaning Torque 30Ncm
- Screw: ISSR20


(N-Hex)

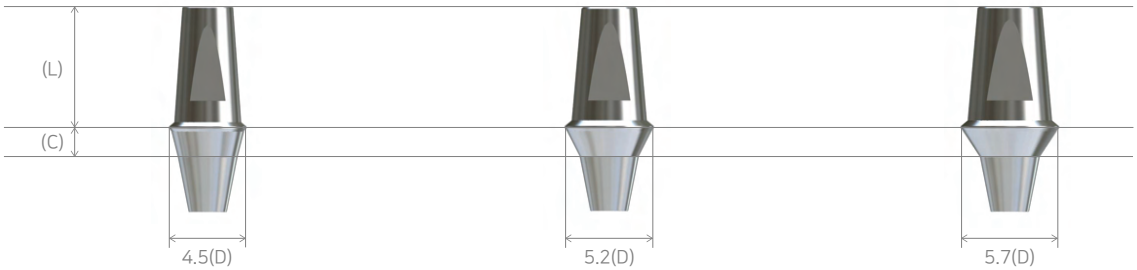

Diameter	4.5(D)			5.2(D)			5.7(D)		
Cuff/Length	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)
1.0(C)	ISCN451040	ISCN451055	ISCN451070	ISCN521040	ISCN521055	ISCN521070	ISCN571040	ISCN571055	ISCN571070
2.0(C)	ISCN452040	ISCN452055	ISCN452070	ISCN522040	ISCN522055	ISCN522070	ISCN572040	ISCN572055	ISCN572070
3.0(C)	ISCN453040	ISCN453055	ISCN453070	ISCN523040	ISCN523055	ISCN523070	ISCN573040	ISCN573055	ISCN573070
4.0(C)	ISCN454040	ISCN454055	ISCN454070	ISCN524040	ISCN524055	ISCN524070	ISCN574040	ISCN574055	ISCN574070
5.0(C)	ISCN455040	ISCN455055	ISCN455070	ISCN525040	ISCN525055	ISCN525070	ISCN575040	ISCN575055	ISCN575070

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: ISSR20


Angled Abutment
(Hex)

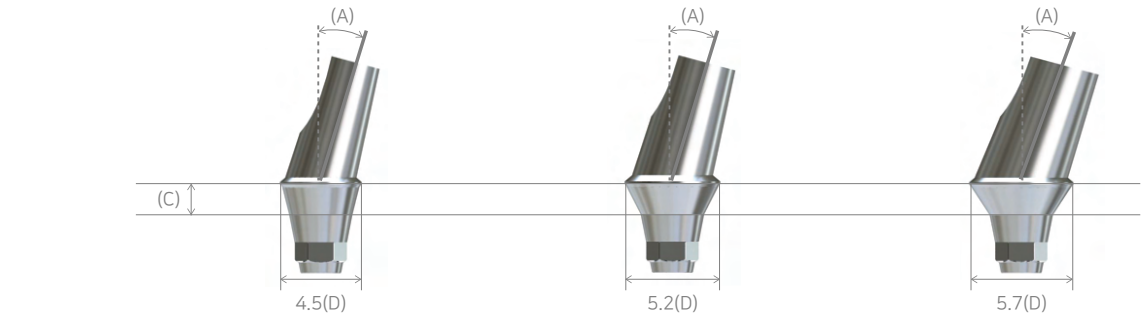

Diameter	4.5(D)		5.2(D)		5.7(D)	
Cuff/Angle	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)
2.0(C)	ISAH452015	ISAH452025	ISAH522015	ISAH522025	ISAH572015	ISAH572025
3.0(C)	ISAH453015	ISAH453025	ISAH523015	ISAH523025	ISAH573015	ISAH573025
4.0(C)	ISAH454015	ISAH454025	ISAH524015	ISAH524025	ISAH574015	ISAH574025

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: ISSR20


(N-Hex)

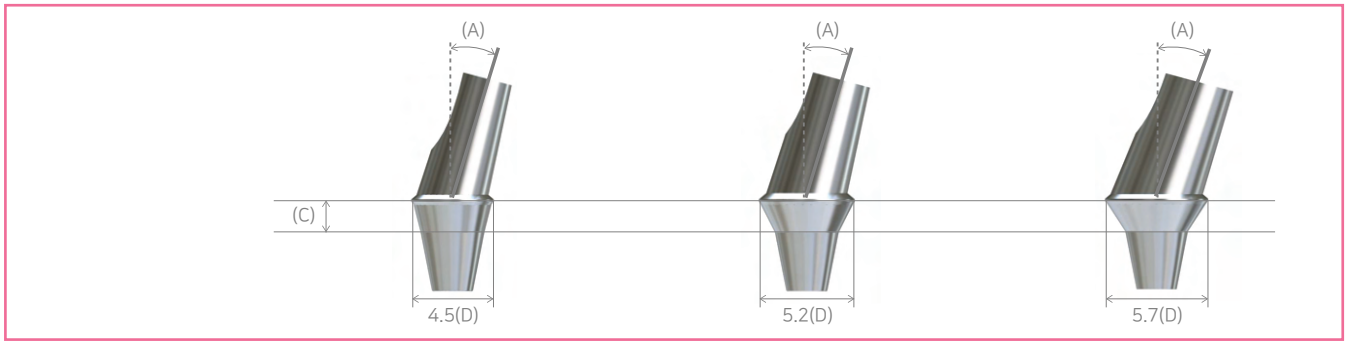

Diameter	4.5(D)		5.2(D)		5.7(D)	
Cuff/Angle	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)
2.0(C)	ISAN452015	ISAN452025	ISAN522015	ISAN522025	ISAN572015	ISAN572025
3.0(C)	ISAN453015	ISAN453025	ISAN523015	ISAN523025	ISAN573015	ISAN573025
4.0(C)	ISAN454015	ISAN454025	ISAN524015	ISAN524025	ISAN574015	ISAN574025

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: ISSR20

Pre-milled Abutment

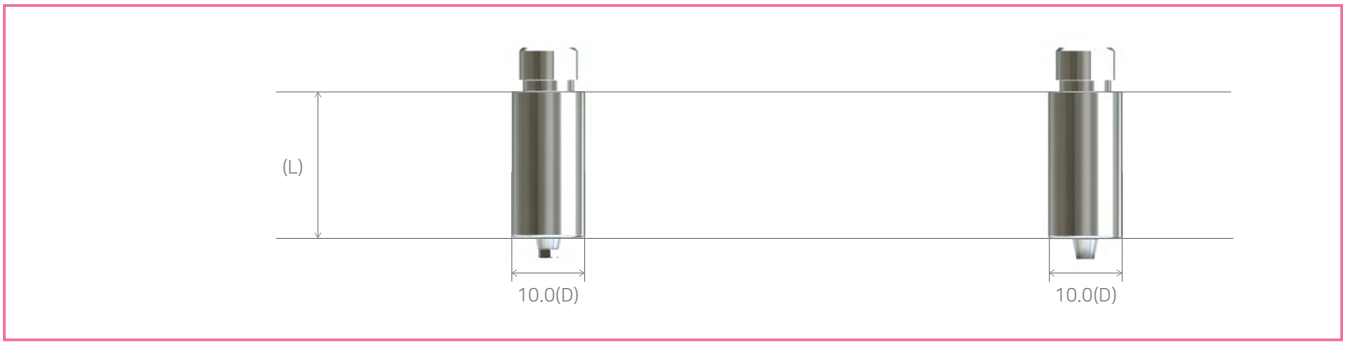

Diameter	10.0(D)	10.0(D)
Length/Type	Hex	N-Hex
20.0(L)	ISMH1020R	ISMN1020R

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm

ZION
디지털 초정밀 가공업체 (주)지온
T. 050.2007.2875 F. 050.2008.2875
E-Mail. zionmedi@daum.net
Homepage. www.zionhome.co.kr
BLog. blog.naver.com/zionics_official
부산본사. 부산시 강서구 낙동북로 126번길 16-32
서울지사. 서울시 강서구 강서로 415, 203
Kakao Plus. "(주)지온" 검색 후 친구 추가 하기!
E-Catalog. zionhome.co.kr/library