ZIONICS UF
ABUTMENT SYSTEM

Zion Co., Ltd. uses Grade 5 titanium alloys from FORT WAYNE Co., Ltd.

It has an international reputation as a titanium supplier in the medical field, to minimize product deformation.


95% global share of titanium wire for human insertion,

Used by leading implant manufacturers such as Strauman and Zimmer.

We produce products with such reliable quality raw materials.



ZION

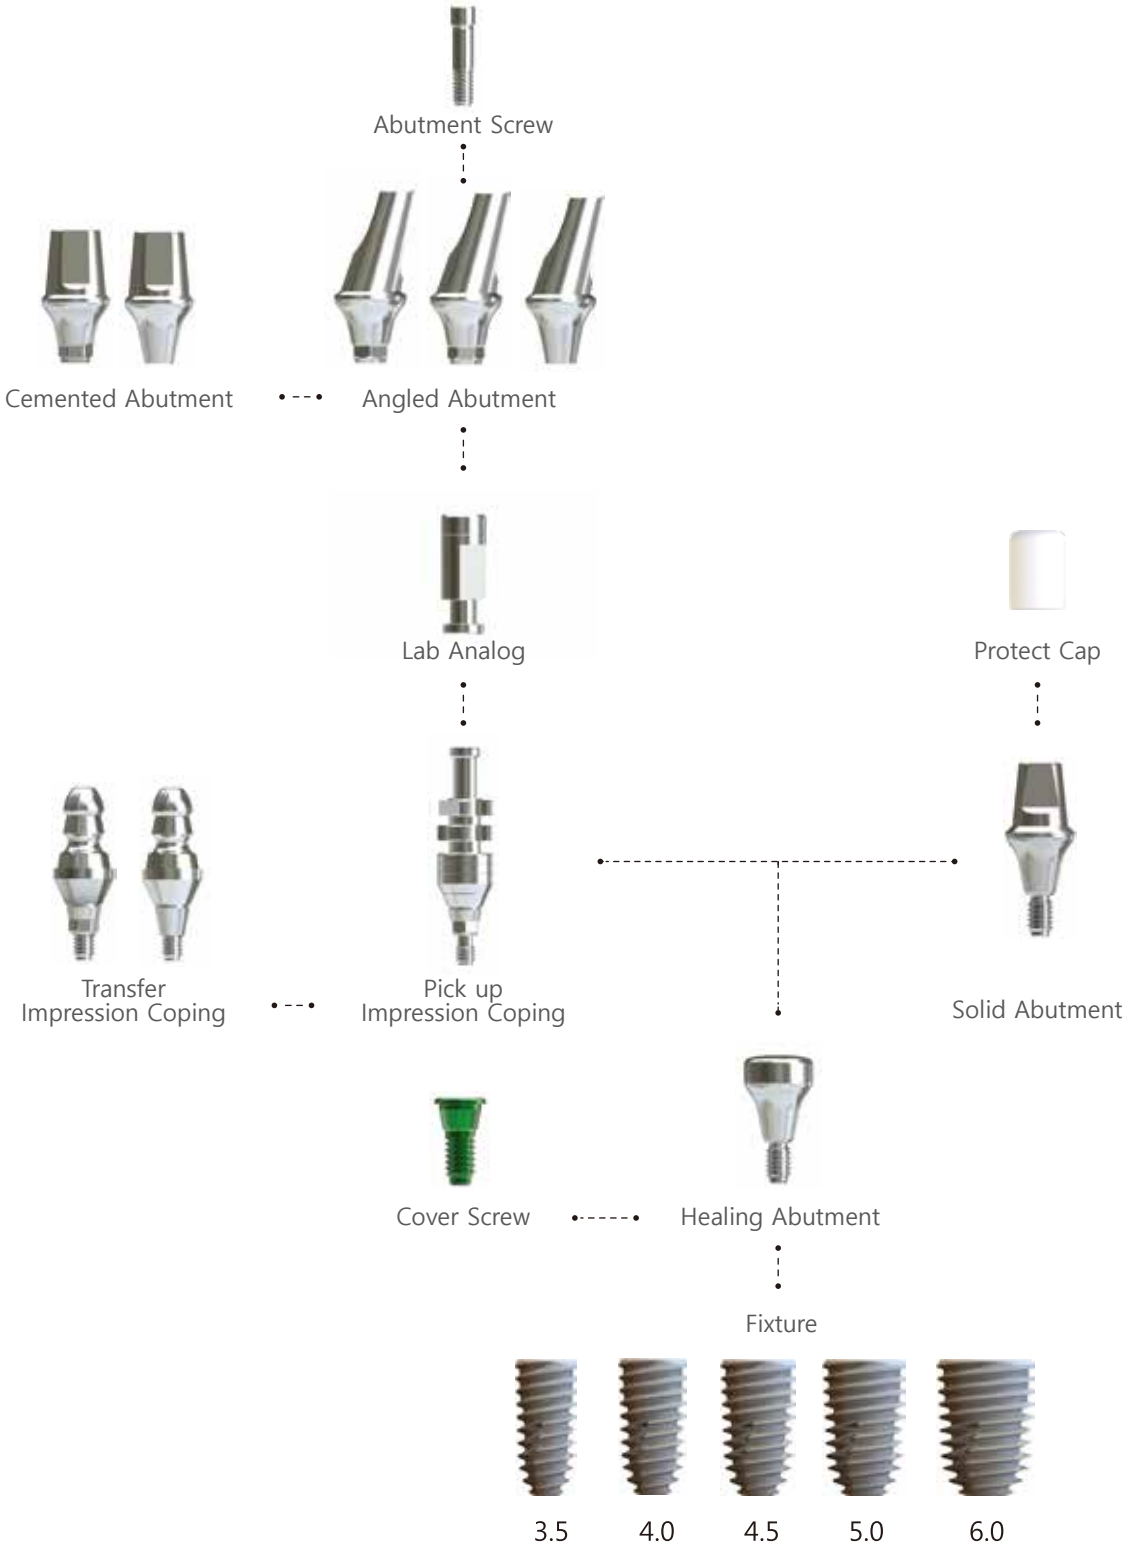
Abutment Screw
Cemented Abutment
Angled Abutment
Lab Analog
Protect Cap
Transfer
Impression Coping
Pick up
Impression Coping
Solid Abutment
Cover Screw
Healing Abutment
Fixture
3.5
4.0
4.5
5.0
6.0

Healing Abutment



Hight/Diameter	4.5(D)	5.5(D)	6.5(D)	7.5(D)
3.5(H)	SHN4535	SHN5535	SHN6535	SHN7535
4.5(H)	SHN4545	SHN5545	SHN6545	SHN7545
5.5(H)	SHN4555	SHN5555	SHN6555	SHN7555
6.5(H)	SHN4565	SHN5565	SHN6565	SHN7565
7.5(H)	SHN4575	SHN5575	SHN6575	SHN7575

- How to use: Use 1.2 Hex Driver / Tightening torque 5 ~ 8Ncm


Pick up Impression Coping (Hex)



Length/Diameter	4.5(D)	5.5(D)	6.5(D)
16.0(L)	SIH45S	SIH55S	SIH65S
21.0(L)	SIH45L	SIH55L	SIH65L

- How to use: Use 1.2 Hex Driver

Transfer Impression Coping

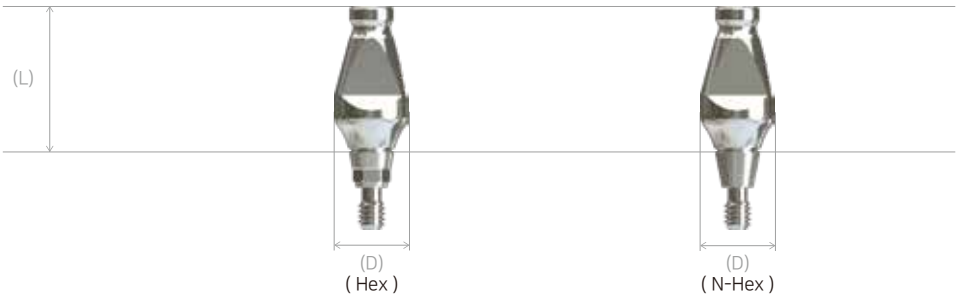

(Hex)

Length/Diameter	4.5(D)	5.5(D)	6.5(D)
11.0(L)	STH45S	STH55S	STH65S
16.0(L)	STH45L	STH55L	STH65L

(N-Hex)

Length/Diameter	4.5(D)	5.5(D)	6.5(D)
11.0(L)	STN45S	STN55S	STN65S
16.0(L)	STN45L	STN55L	STN65L

- How to use: Use 1.2 Hex Driver

Lab Analog



Length/Diameter	4.5(D)
12.0(L)	SLH01

- Purpose of use: Implement intraoral fixture in working model

Cover Screw



- How to Use: Use 1.2Hex Driver

Cemented Abutment
(Hex)



Diameter	4.5(D)			5.5(D)			6.5(D)			7.5(D)		
Cuff/Length	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)
1.5(C)	SCH451540	SCH451555	SCH451570	SCH551540	SCH551555	SCH551570	SCH651540	SCH651555	SCH651570	SCH751540	SCH751555	SCH751570
2.5(C)	SCH452540	SCH452555	SCH452570	SCH552540	SCH552555	SCH552570	SCH652540	SCH652555	SCH652570	SCH752540	SCH752555	SCH752570
3.5(C)	SCH453540	SCH453555	SCH453570	SCH553540	SCH553555	SCH553570	SCH653540	SCH653555	SCH653570	SCH753540	SCH753555	SCH753570
4.5(C)	SCH454540	SCH454555	SCH454570	SCH554540	SCH554555	SCH554570	SCH654540	SCH654555	SCH654570	SCH754540	SCH754555	SCH754570
5.5(C)	SCH455540	SCH455555	SCH455570	SCH555540	SCH555555	SCH555570	SCH655540	SCH655555	SCH655570	SCH755540	SCH755555	SCH755570

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: SCS2010


(N-Hex)



Diameter	4.5(D)			5.5(D)			6.5(D)			7.5(D)		
Cuff/Length	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)
1.5(C)	SCN451540	SCN451555	SCN451570	SCN551540	SCN551555	SCN551570	SCN651540	SCN651555	SCN651570	SCN751540	SCN751555	SCN751570
2.5(C)	SCN452540	SCN452555	SCN452570	SCN552540	SCN552555	SCN552570	SCN652540	SCN652555	SCN652570	SCN752540	SCN752555	SCN752570
3.5(C)	SCN453540	SCN453555	SCN453570	SCN553540	SCN553555	SCN553570	SCN653540	SCN653555	SCN653570	SCN753540	SCN753555	SCN753570
4.5(C)	SCN454540	SCN454555	SCN454570	SCN554540	SCN554555	SCN554570	SCN654540	SCN654555	SCN654570	SCN754540	SCN754555	SCN754570
5.5(C)	SCN455540	SCN455555	SCN455570	SCN555540	SCN555555	SCN555570	SCN655540	SCN655555	SCN655570	SCN755540	SCN755555	SCN755570

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: SCS2010


Angled Abutment
(Hex)

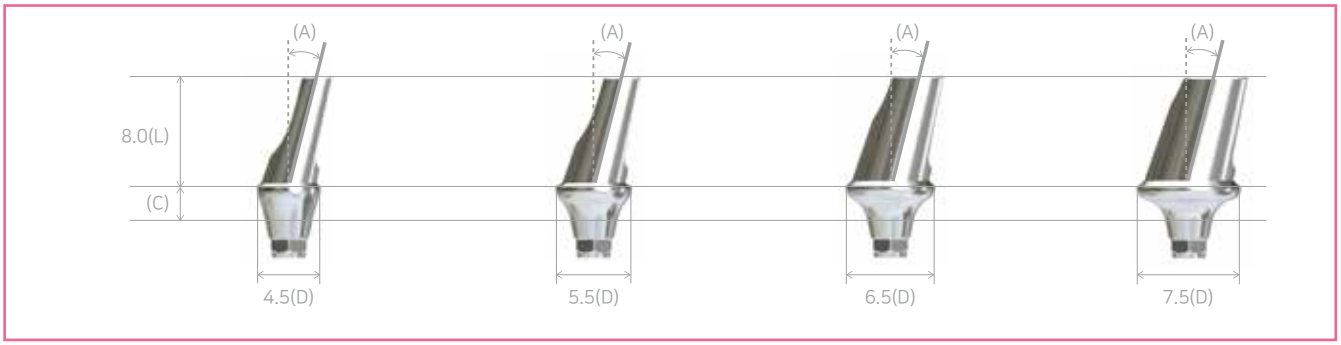

Diameter	4.5(D)		5.5(D)		6.5(D)		7.5(D)	
Cuff/Length	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)
1.5(C)	SAH451515	SAH451525	SAH551515	SAH551525	SAH651515	SAH651525	SAH751515	SAH751525
2.5(C)	SAH452515	SAH452525	SAH552515	SAH552525	SAH652515	SAH652525	SAH752515	SAH752525
3.5(C)	SAH453515	SAH453525	SAH553515	SAH553525	SAH653515	SAH653525	SAH753515	SAH753525
4.5(C)	SAH454515	SAH454525	SAH554515	SAH554525	SAH654515	SAH654525	SAH754515	SAH754525
5.5(C)	SAH455515	SAH455525	SAH555515	SAH555525	SAH655515	SAH655525	SAH755515	SAH755525
6.5(C)	SAH456515	SAH456525	SAH556515	SAH556525	SAH656515	SAH656525	SAH756515	SAH756525

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: SCS2010


(Hex-B)

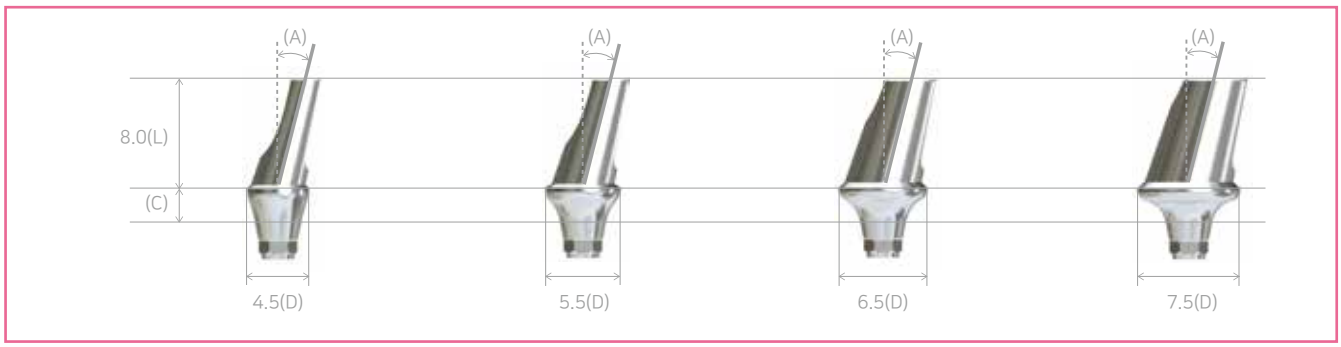

Diameter	4.5(D)		5.5(D)		6.5(D)		7.5(D)	
Cuff/Length	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)
1.5(C)	SAHB451515	SAHB451525	SAHB551515	SAHB551525	SAHB651515	SAHB651525	SAHB751515	SAHB751525
2.5(C)	SAHB452515	SAHB452525	SAHB552515	SAHB552525	SAHB652515	SAHB652525	SAHB752515	SAHB752525
3.5(C)	SAHB453515	SAHB453525	SAHB553515	SAHB553525	SAHB653515	SAHB653525	SAHB753515	SAHB753525
4.5(C)	SAHB454515	SAHB454525	SAHB554515	SAHB554525	SAHB654515	SAHB654525	SAHB754515	SAHB754525
5.5(C)	SAHB455515	SAHB455525	SAHB555515	SAHB555525	SAHB655515	SAHB655525	SAHB755515	SAHB755525
6.5(C)	SAHB456515	SAHB456525	SAHB556515	SAHB556525	SAHB656515	SAHB656525	SAHB756515	SAHB756525

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: SCS2010

(N-Hex)

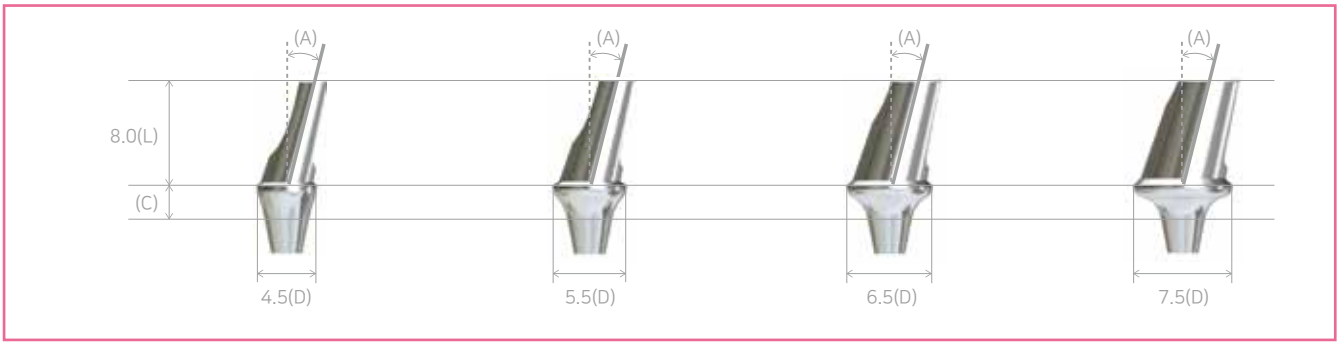

Diameter	4.5(D)		5.5(D)		6.5(D)		7.5(D)	
Cuff/Angle	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)	15(A)	25(A)
1.5(C)	SAN451515	SAN451525	SAN551515	SAN551525	SAN651515	SAN651525	SAN751515	SAN751525
2.5(C)	SAN452515	SAN452525	SAN552515	SAN552525	SAN652515	SAN652525	SAN752515	SAN752525
3.5(C)	SAN453515	SAN453525	SAN553515	SAN553525	SAN653515	SAN653525	SAN753515	SAN753525
4.5(C)	SAN454515	SAN454525	SAN554515	SAN554525	SAN654515	SAN654525	SAN754515	SAN754525
5.5(C)	SAN455515	SAN455525	SAN555515	SAN555525	SAN655515	SAN655525	SAN755515	SAN755525

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm
- Screw: SCS2010


Solid Abutment



Diameter	4.5(D)			5.5(D)			6.5(D)			7.5(D)		
Cuff/Length	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)	4.0(L)	5.5(L)	7.0(L)
1.5(C)	SSN451540	SSN451555	SSN451570	SSN551540	SSN551555	SSN551570	SSN651540	SSN651555	SSN651570	SSN751540	SSN751555	SSN751570
2.5(C)	SSN452540	SSN452555	SSN452570	SSN552540	SSN552555	SSN552570	SSN652540	SSN652555	SSN652570	SSN752540	SSN752555	SSN752570
3.5(C)	SSN453540	SSN453555	SSN453570	SSN553540	SSN553555	SSN553570	SSN653540	SSN653555	SSN653570	SSN753540	SSN753555	SSN753570
4.5(C)	SSN454540	SSN454555	SSN454570	SSN554540	SSN554555	SSN554570	SSN654540	SSN654555	SSN654570	SSN754540	SSN754555	SSN754570
5.5(C)	SSN455540	SSN455555	SSN455570	SSN555540	SSN555555	SSN555570	SSN655540	SSN655555	SSN655570	SSN755540	SSN755555	SSN755570

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm


Protect Cap

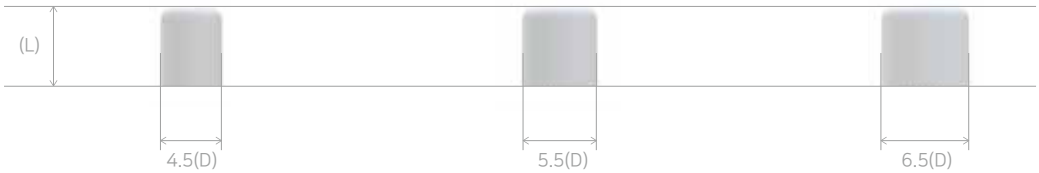

Length/Diameter	4.5(D)	5.5(D)	6.5(D)
4.0(L)	SPC4540	SPC5540	SPC6540
5.5(L)	SPC4555	SPC5555	SPC6555
7.0(L)	SPC4570	SPC5570	SPC6570

- Purpose of use: Protecting abutment, minimizing the patient's foreign matter in the mouth
  Ease of securing margin during impression acquisition

Pre-milled Abutment

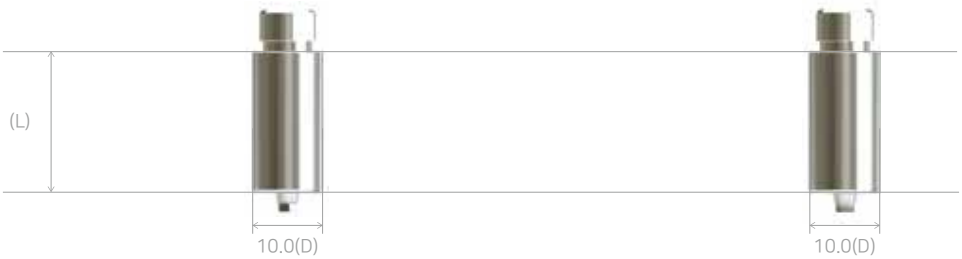

Diameter	10.0(D)	10.0(D)
Length/Type	Hex	N-Hex
20.0(L)	UFMH1020R	UFMN1020R

- How to use: Use 1.2 Hex Driver / Tightening Torque 30Ncm

ZION
디지털 초정밀 가공업체 (주)지온

T. 050.2007.2875 F. 050.2008.2875
E-Mail. zionmedi@daum.net
Homepage. www.zionhome.co.kr
BLog. blog.naver.com/zionics_official

부산본사. 부산시 강서구 낙동북로 126번길 16-32
서울지사. 서울시 강서구 강서로 415, 203
Kakao Plus. "(주)지온" 검색 후 친구 추가 하기!
E-Catalog. zionhome.co.kr/library